

Specification

Tube Fan D801P-024KM-4



General Information

Item	
Product type	Tube fan with integrated electronic motor driver
Part no.	D801P-024KM-4 D803P-024KM-4 with flange at outlet (option) D804P-024KM-4 with flange at inlet (option)
Customer	N/A
Project no.	N/A
Modification	Standard product

Description

In contrast to the Flat Fans, the Micronel Tube Fans offer increased pressure performance while still maintaining a high volume flow. They all feature extremely quiet and efficient operation while offering extreme reliability and life expectancy.

Features

- Static pressure 5.3 hPa, freeflow 2840 l/min
- 24 V_{DC} brushless DC-motor
- Speed control and tacho frequency signal
- Small dimensions through slim design
- Options for mounting flange with holes




General Conditions


Unless otherwise stated all data are measured at nominal voltage and are valid at 20 °C ambient temperature and 1.2 kg/m³ standard air density. Values listed are nominal and can vary depending on the installation conditions and due to component tolerances. Test setup according to ISO 5801 with standardized inlet and outlet chambers. Tolerances based on specified speed data according to ISO 13348, grade 4: pressure +/-10 %, power +16 %. Tolerances based on constant voltage: speed +/-10 %, pressure +/-21 %, power +33 %. For continuous blower operation please refer to specified maximum ratings. Performance data outside normal operating range plotted for information only.

Performance

Pressure vs. Flow Characteristics

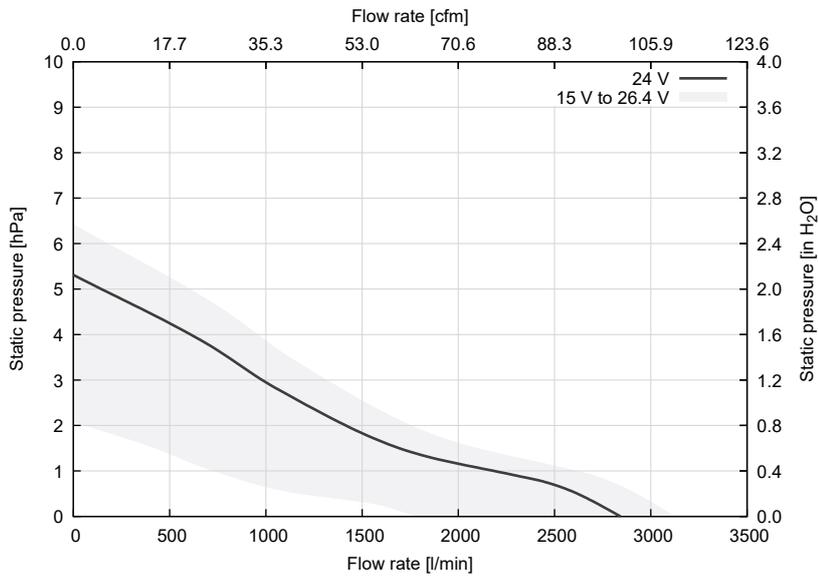

Speed and Power vs. Flow Characteristics

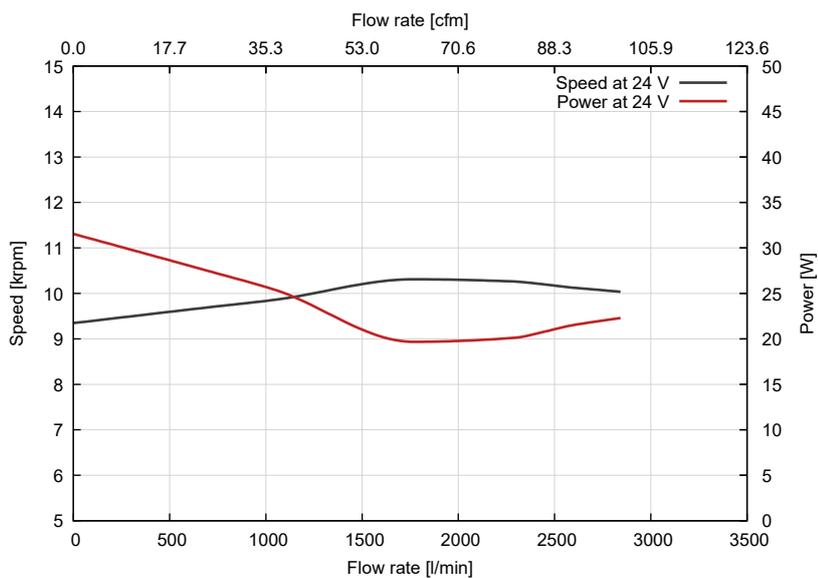

Shut-Off in Pressure Operation (Zero Flow Rate)

	Unit	Value
Static pressure	[hPa]	5.3
Power consumption	[W]	31.5
Speed	[rpm]	9350

Free-Air (Zero Static Pressure)

Flow rate	[l/min]	2840
Power consumption	[W]	22.3
Speed	[rpm]	10040

Technical Data

Electrical	Unit	Value
Nominal supply voltage	[V _{DC}]	24
Supply voltage range	[V _{DC}]	15 to 26.4
Minimum power supply current ⁽¹⁾	[A]	2
Maximum start-up time	[s]	0.25
Maximum ripple voltage	[%]	5

Maximum Ratings for Continuous Operation

Minimum flow rate	[l/min]	N/A
Maximum speed	[rpm]	N/A
Maximum acceleration	[rpm/ms]	N/A
Maximum power consumption	[W]	N/A
Maximum housing surface temperature	[°C]	N/A
Maximum NTC temperature	[°C]	N/A

Environmental

Ambient temperature (operating)	[°C]	-20 to 60
Ambient temperature (storage)	[°C]	-20 to 60
Relative humidity (non-condensing)	[%RH]	10 to 85
Ingress protection (EN60529)		IP40
Maximum oxygen concentration ⁽²⁾	[%]	21

Motor

Type		Brushless direct current motor
Winding insulation class		H, 180 °C
NTC type		N/A

Lifetime

L10 at 25 °C ambient temperature ⁽³⁾	[h]	20 000
---	-----	--------

Acoustics

Sound pressure level ⁽⁴⁾	[dB(A)]	58.1
-------------------------------------	---------	------

Leak Tightness

Maximum leak flow rate	[l/min]	N/A
------------------------	---------	-----

Mechanical

Fan weight	[g]	191
------------	-----	-----

⁽¹⁾ Recommended minimum continuous power supply current for proper start-up behavior at nominal voltage. This is an indicative value. Power supply dimensioning, wiring, safety, setup and validation is the customer's responsibility.


⁽²⁾ Micronel fans are designed for various levels of oxygen compatibility. Further information available on request.

⁽³⁾ Calculated value for normal cleanliness according to ISO 281. Accelerated aging test ongoing. Temperature dependency of lifetime according to IPC-9591: factor 1.5 per 10°C.

⁽⁴⁾ Measured at distance of 1 meter to the fan, with hose connected to inlet and outlet.

Drawings

Dimensions in mm

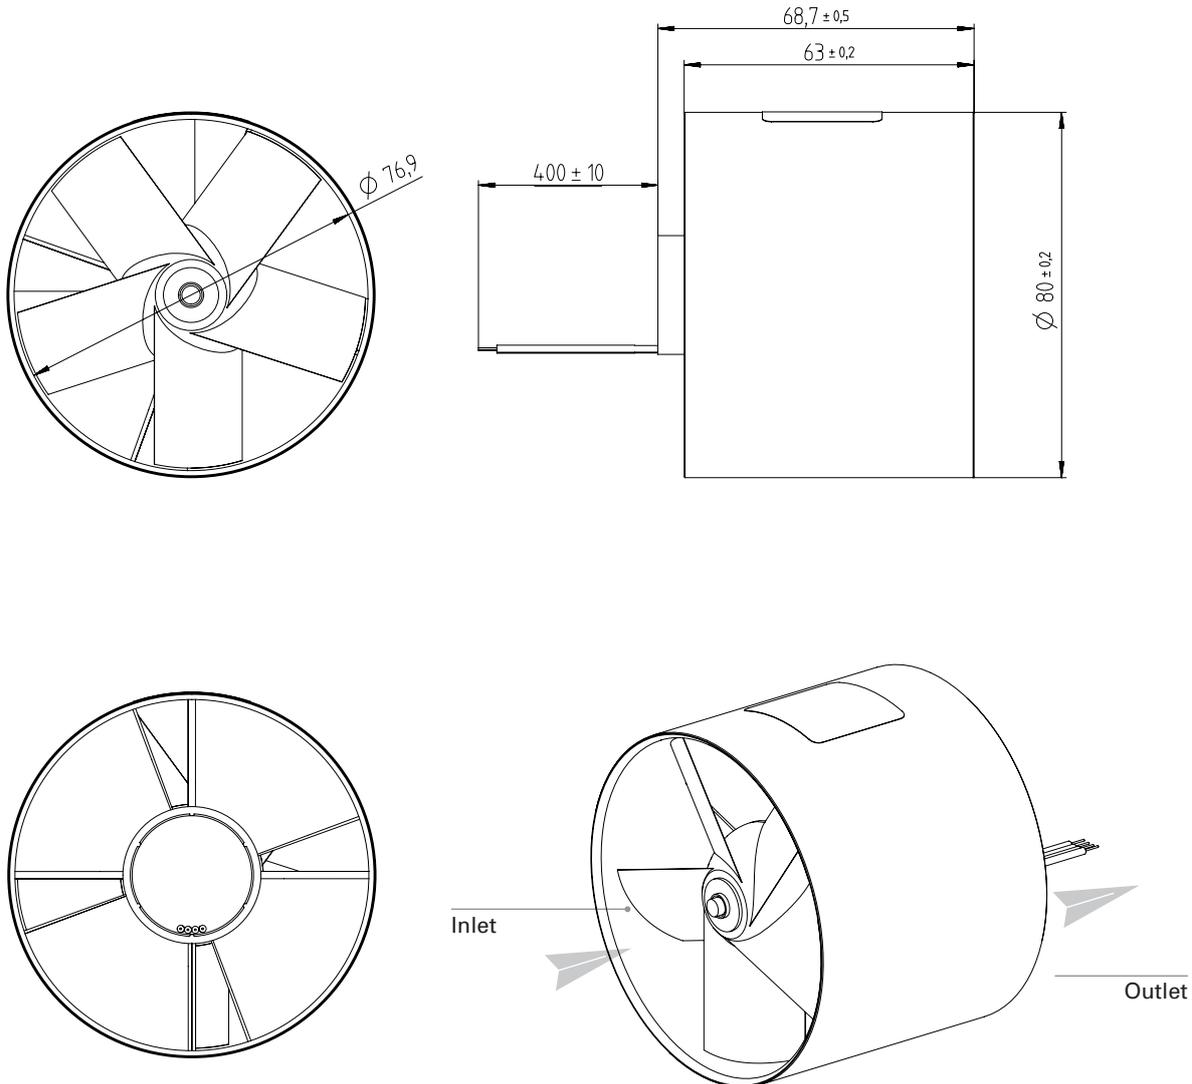

Orientations

Direction of rotation	 Clockwise (view on inlet)
Mounting position	Any direction

Materials

Components	Material
Fan housing	Aluminum anodized black
Impeller	Polyphenylenoxide (PPO) Flammability: UL 94V-1
Hub	Brass
Motor housing	Polysulfon (PSU)
Label	Plastic (26 x 26 mm) Flammability: UL 969
Connector	-
Crimp terminal	-
Lead wire	Silicone insulated cable Flammability: UL 3239

Identification

Label

Design

	<p>Micronel AG CH-8317 Tagelswangen</p> <p>Micronel Tube Fan D801P-024KM-4 2327 999999 001</p> <p>24VDC</p> <p>MANUFACTURED IN SWITZERLAND </p>	
Part number	→	Identification number: • Year, calendar week (YYWW) • Fabrication number (6 digits) • Serial number (3 digits)
Nominal voltage	→	

Blower Pinout

Pin	Color	Description	AWG
-	Red	V _{CC}	24
-	Black	GND	24
-	Yellow	Tachometer output	24
-	Green	Set speed input	24

Electronic Functions


Integrated Electronic Motor Driver

Type

Sensored brushless direct current motor driver

Features

- Integrated speed control (PWM / Voltage)
- Tachometer frequency signal
- Locked rotor protection
- Over current protection

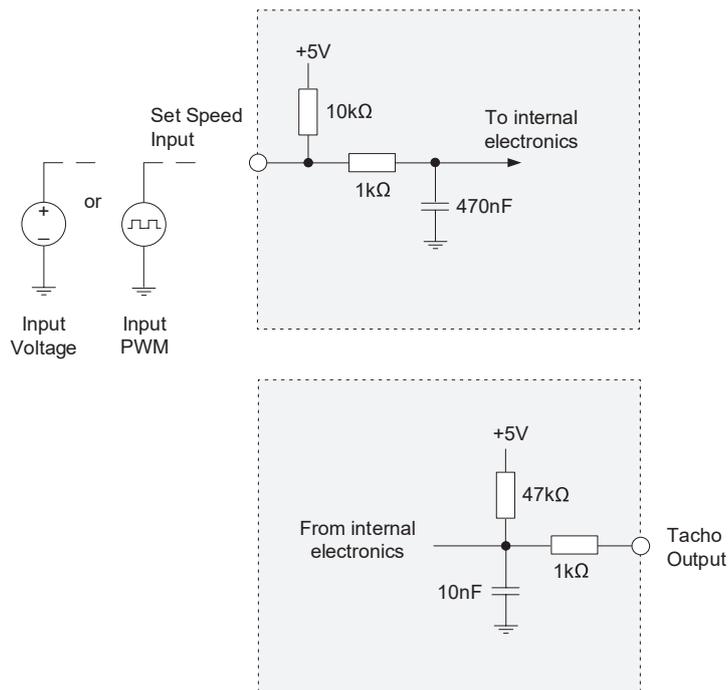

Speed Control Input

The fan speed can be controlled by either input voltage or PWM. See „Set Speed Input“ table for further details.

Tachometer Output

Tachometer frequency:
1 pulse per revolution

$$n = 60 \cdot f$$

n Rotation speed [rpm]

f Tacho frequency [Hz]

Electronic Functions

Set Speed Input Voltage [V _{DC}]	Operation Mode
Set speed not connected	Fan speed at 100 %
Set speed to ground	Stop
< 0.0	Not allowed
0.0	Stop
0.5 to 0.9	Not defined, fan might run or stop
1.0	Minimum start-up voltage
1.0 to 4.5	Fan speed depending on input voltage
4.5 to 5.0	Fan speed at 100 %
> 5.0	Not allowed



Set Speed Input PWM [%]	Operation Mode
Set speed not connected	Fan speed at 100 %
Set speed to ground	Stop
0.0	Stop
0.1 to 9.0	Not defined, fan might run or stop
10.0	Minimum start-up
10.0 to 90.0	Fan speed depending on duty cycle
90.0 to 100.0	Fan speed at 100 %

Frequency 1 kHz – 60 kHz; (TYP 20 kHz)

Options for Mounting

Product no. with options	Flange Inlet	Flange Outlet
Micronel Tube Fan D801P-024KM-4		
Micronel Tube Fan D803P-024KM-4*		●
Micronel Tube Fan D804P-024KM-4*	●	

* The drawings show versions of flange.

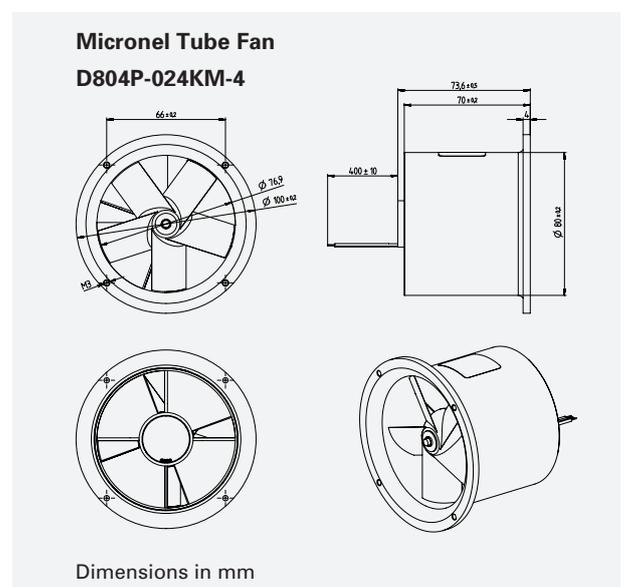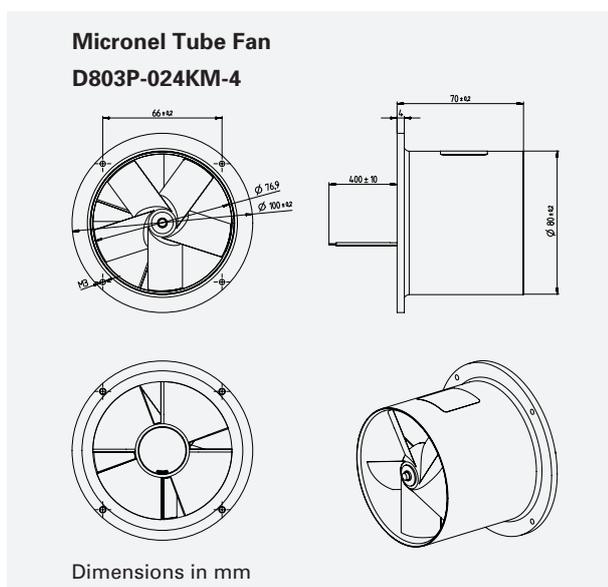

Note



Handle in power-off conditions only!
Read operating manual!



Please see separate accessories list or contact
Micronel Sales for a full list of options and
accessories.