

Specification

Radial Blower U71HL-024KM-4



General Information


Item	
Product type	Radial blower with integrated electronic motor driver
Part no.	U71HL-024KM-4 U71HL-024KM-41 with inlet port (option) U71HL-024KM-42 with outlet port (option) U71HL-024KM-43 with inlet and outlet port (option)
Customer	N/A
Project no.	N/A
Modification	Standard product

Description

This versatile and powerful blower has been designed for cost sensitive applications. It provides an integrated brushless driver with set-speed input and tacho output and is optionally available with inlet and outlet nozzles.

Features

- Static pressure: 69 hPa, freeflow: 470 l/min
- 24 V_{DC} brushless DC-motor
- Speed control and tacho frequency signal
- Aluminum heat sink
- Options for in- and outlet ports


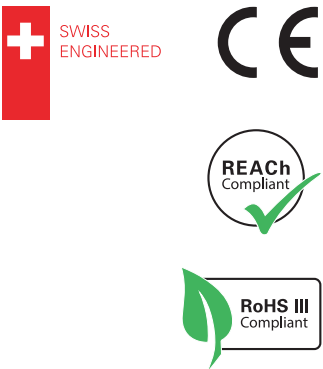


General Conditions



Unless otherwise stated all data are measured at nominal voltage and are valid at 20 °C ambient temperature and 1.2 kg/m³ standard air density. Values listed are nominal and can vary depending on the installation conditions and due to component tolerances. Test setup according to ISO 5801 with standardized inlet and outlet chambers. Tolerances based on specified speed data according to ISO 13348, grade 4: pressure +/-10 %, power +16 %. Tolerances based on constant voltage: speed +/-10 %, pressure +/-21 %, power +33 %. For continuous blower operation please refer to specified maximum ratings. Performance data outside normal operating range plotted for information only.

Performance

Pressure Operation at Outlet

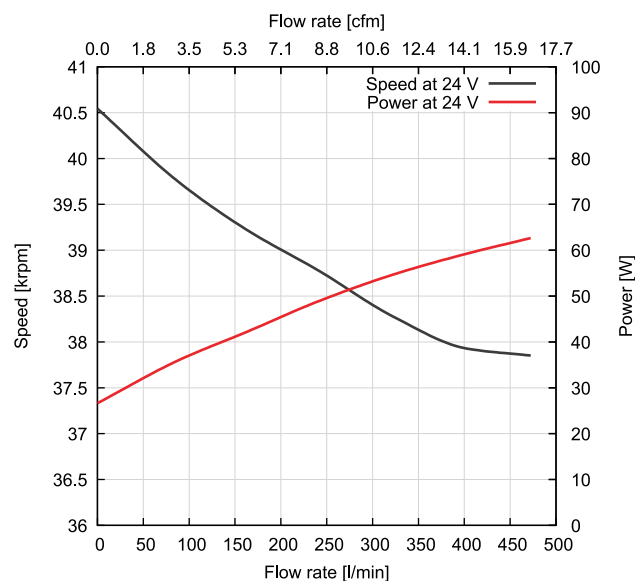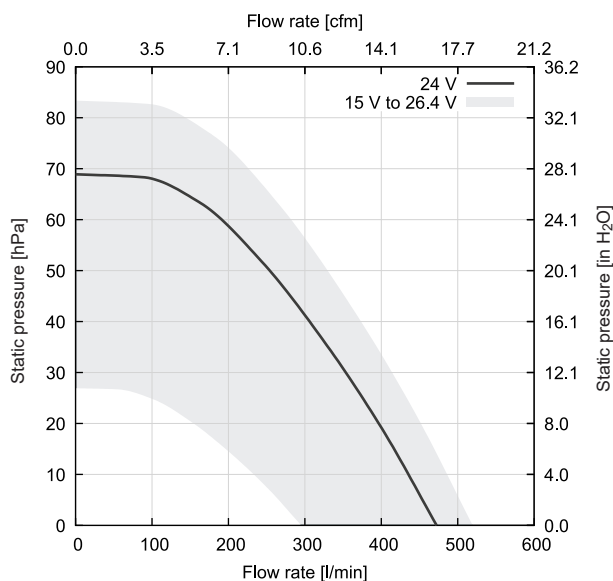

Vacuum Operation at Inlet

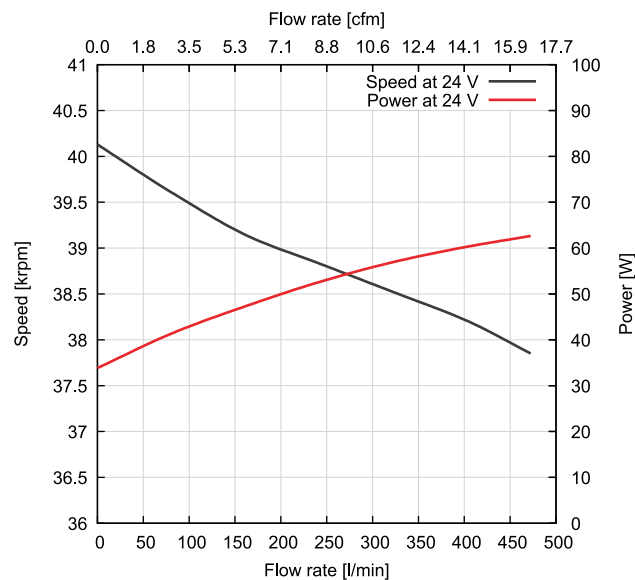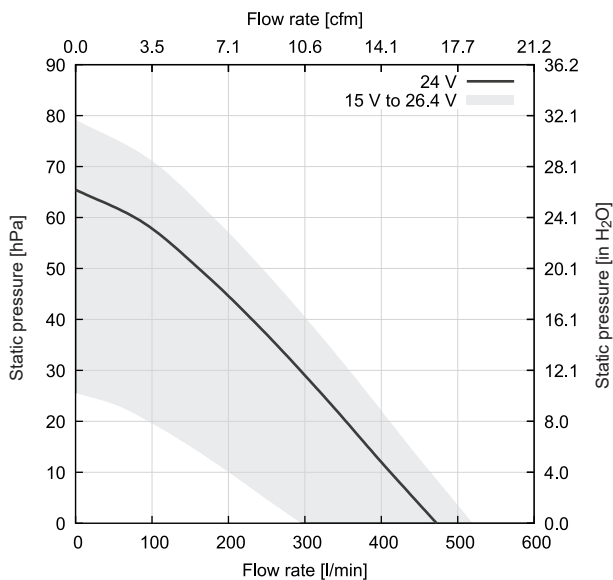

Shut-Off in Pressure Operation (Zero Flow Rate)

	Unit	Value
Static pressure	[hPa]	69
Power consumption	[W]	27
Speed	[rpm]	40500

Shut-Off in Vacuum Operation (Zero Flow Rate)

Static pressure	[hPa]	64
Power consumption	[W]	34
Speed	[rpm]	40100

Free-Air (Zero Static Pressure)

Flow rate	[l/min]	470
Power consumption	[W]	63
Speed	[rpm]	37900

Technical Data


Electrical	Unit	Value
Nominal supply voltage	[V _{DC}]	24
Supply voltage range	[V _{DC}]	15 to 26.4
Minimum power supply current ⁽¹⁾	[A]	N/A
Maximum start-up time	[s]	N/A
Maximum ripple voltage	[%]	5
Maximum Ratings for Continuous Operation		
Minimum flow rate	[l/min]	N/A
Maximum speed	[rpm]	40500
Maximum acceleration	[rpm/ms]	N/A
Maximum power consumption	[W]	63
Maximum housing surface temperature	[°C]	65
Maximum NTC temperature	[°C]	N/A
Environmental		
Ambient temperature (operating)	[°C]	-20 to 45
Ambient temperature (storage)	[°C]	-20 to 45
Relative humidity (non-condensing)	[%RH]	10 to 95
Ingress protection (EN60529)		IP40
Maximum oxygen concentration	[%]	21
Motor		
Type		Brushless direct current motor
Winding insulation class		H, 180 °C
NTC type		N/A
Lifetime		
L10 at 25 °C ambient temperature ⁽²⁾	[h]	20 000
Acoustics		
Sound pressure level	[dB(A)]	N/A
Leak Tightness		
Maximum leak flow rate	[l/min]	N/A
Mechanical		
Blower weight	[g]	358

⁽¹⁾ Recommended minimum continuous power supply current for proper start-up behavior at nominal voltage. This is an Indicative value. Power supply dimensioning, wiring, safety, setup and validation is the customer's responsibility.

⁽²⁾ Accelerated aging test at 45 °C ambient temperature, normal cleanliness according to ISO 281. Temperature dependency of lifetime according to IPC-9591: factor 1.5 per 10 °C.

Drawings

Dimensions in mm

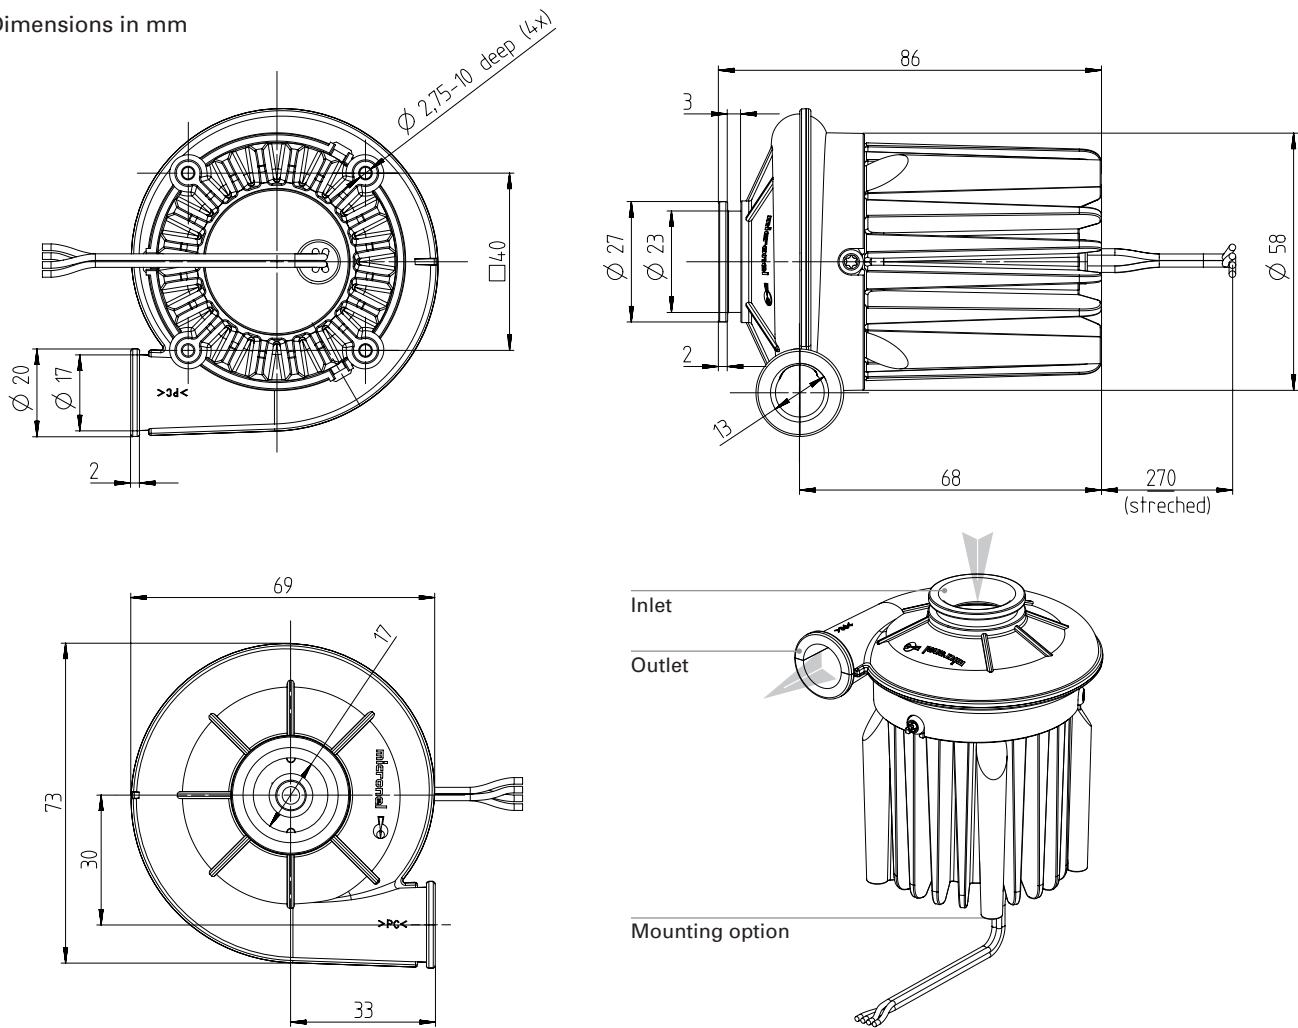

Orientations

Direction of rotation

 Counter-clockwise (view on inlet)


Mounting position

Any direction

Materials

Components	Material
Blower housing	Polycarbonate (PC), transparent Flammability: 850 °C
Impeller	Polyamide (PA 6), white
Hub	Stainless steel
Motor housing	Aluminum
Label	Plastics
Connector	N/A
Crimp terminal	N/A
Lead wire	High flex silicon Flammability: UL 3239

Identification


Label		
Design		
Part number	U71HL-024KM-4	Identification number: <ul style="list-style-type: none">• Year, calendar week (YYWW)• Fabrication number (6 digits)• Serial number (3 digits)
Nominal voltage	24VDC	
	2013 999999 001	

Blower Pinout

Pin	Color	Description	AWG
1	Red	V _{CC}	24
2	Black	GND	24
3	Yellow	Tachometer output	24
4	Green	Set speed input	24

Electronic Functions

Integrated Electronic Motor Driver	
Type	Sensorless brushless direct current motor driver
Features	<ul style="list-style-type: none">• Integrated speed control (voltage / resistor)• Tachometer frequency signal• Locked rotor protection• Over voltage protection• Polarity protection

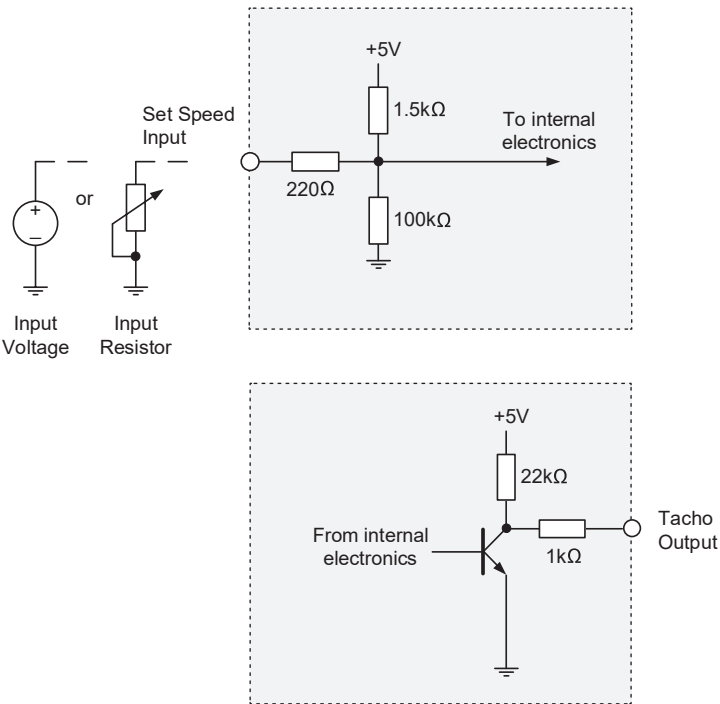

Speed Control Input

The blower speed can be controlled either by input voltage or input resistor value. See „Set Speed Input“ tables for further details.

Tachometer Output


Tachometer frequency:
3 pulses per revolution
 $n = 20 \cdot f$
 n Rotation speed [rpm]
 f Tacho frequency [Hz]

Electronic Functions

Set Speed Input Voltage [V _{DC}]	Operation Mode
Set speed not connected	Blower speed at 100 %
Set speed to ground	Stop
0.0	Stop
0.1 to 1.5	Not defined, blower might run or stop
2.0	Minimum start-up voltage
1.5 to 4.0 (after start-up)	Blower speed depending on input voltage
4.0 to 5.0	Blower speed at 100 %

Set Speed Input Resistor [kΩ]	Operation Mode
Set speed not connected	Blower speed at 100 %
Set speed to ground	Stop
0.0 to 0.06	Stop
0.06 to 0.75	Not defined, blower might run or stop
0.75	Minimum start-up resistance
0.75 to 6.8 (after start-up)	Blower speed depending on resistor value
> 6.8 or open input	Blower speed at 100 %


Options for Inlet and Outlet Ports*

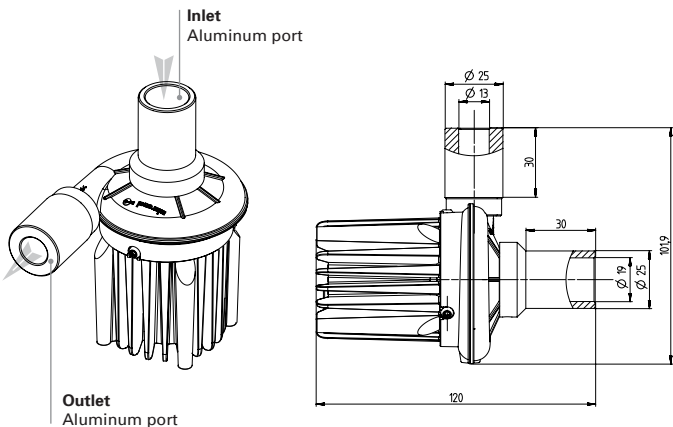


Article with options	Inlet port	Outlet port
Radial Blower U71HL-024KM-4		
Radial Blower U71HL-024KM-41	●	
Radial Blower U71HL-024KM-42		●
Radial Blower U71HL-024KM-43	●	●

* The drawings show inlet and outlet ports.
Both options are independet of each other.
No application of forces on ports allowed!

Note



Handle in power-off conditions only!
Read operating manual!



Please see separate accessories list or contact
Micronel Sales for a full list of options and
accessories.